


WIND CLASSIFICATION N4 OR GREATER

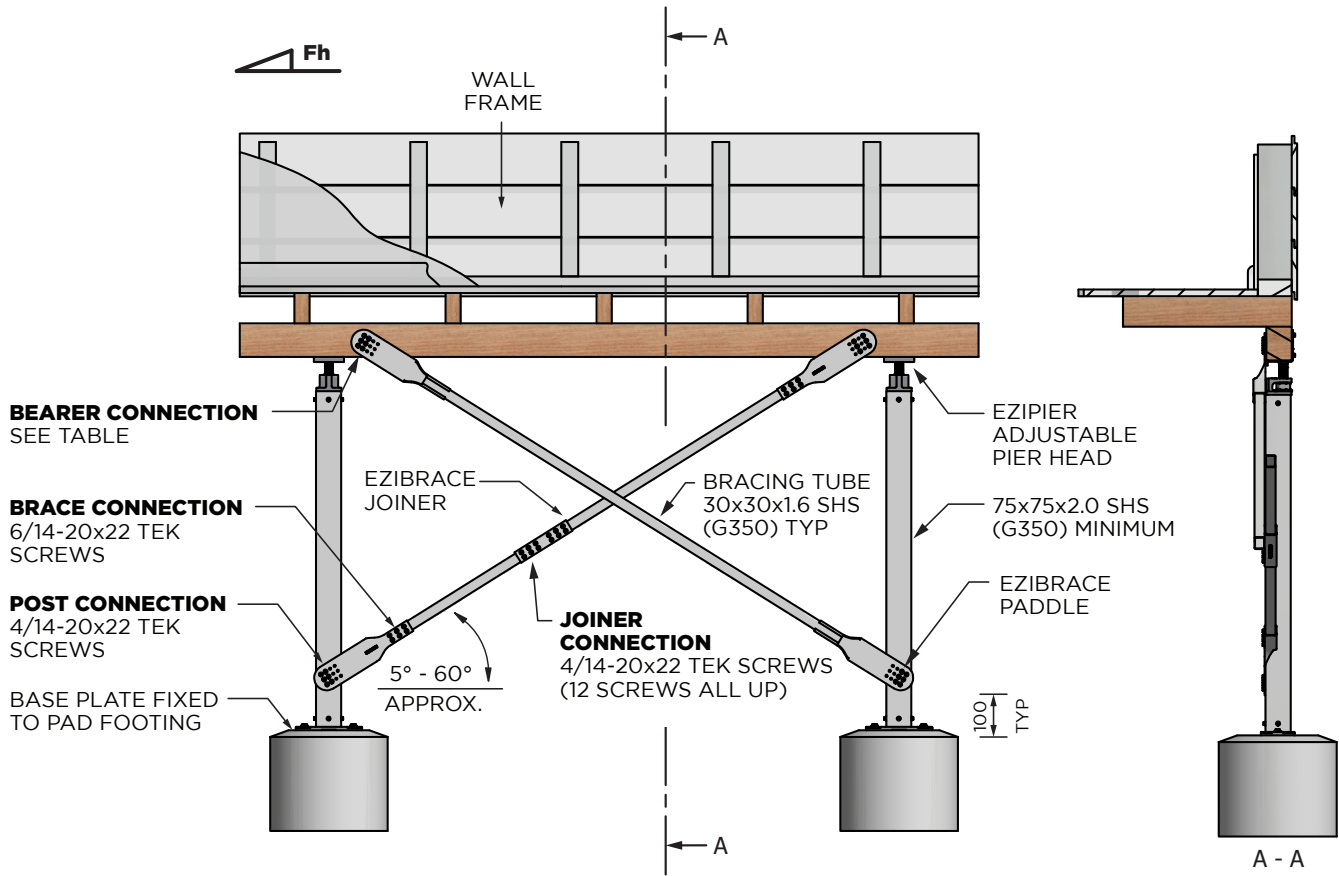

EZIBRACE CAPACITIES (N4 OR GREATER)

ALL BRACING LOADS ARE CALCULATED USING ULTIMATE STATE DESIGN

PIER HEIGHT (m)	HORIZONTAL RACKING FORCE F_h (kN)					
	PIER GRID SPACING (m)					
	1.8	2.4	3.0	3.6	4.2	4.8
0.6	24.5	25.0	25.3	25.4	25.5	25.6
0.9	23.1	24.2	24.7	25.0	25.2	25.4
1.2	21.5	23.1	24.0	24.5	24.8	25.0
1.5	19.8	21.9	23.1	23.8	24.3	24.6
1.8	18.2	20.6	22.1	23.1	23.7	24.2
2.4	15.5	18.2	20.1	21.5	22.4	23.1
3.0	13.3	16.1	18.2	19.8	21.0	21.9
3.3	12.4	15.2	17.4	19.0	20.3	21.3
3.6	11.5	14.3	16.5	18.2	19.6	20.6

BEARER CONNECTION - TYPICAL FASTENERS

BEARER TYPE	SIZE/THICK NESS (mm)	TYPE 17 14-10x50	14-20x22 SCREWS	12-24x20 SCREWS	M12 BOLTS
LVL	90 x 58 (JD4)	9	-	-	3
HARDWOOD	90 x 70 (JD3)	6	-	-	3
RHS	150x50x2.0	-	4	4	2
C-SECTION	C15019	-	4	5	2

Structural Design Certification By:

DESIGN. PLAN. MANAGE
ACN 088 342 645
136 Darling Street, Dubbo NSW 2830

Richard J. Noonan
Richard J. Noonan
BE(Hons)ME MIEAust CPEng
NPER 472690, RPEQ 5264,
VIC EC2249, NT 11585ES,
Date: 2-10-2015
Reference No: 20727